

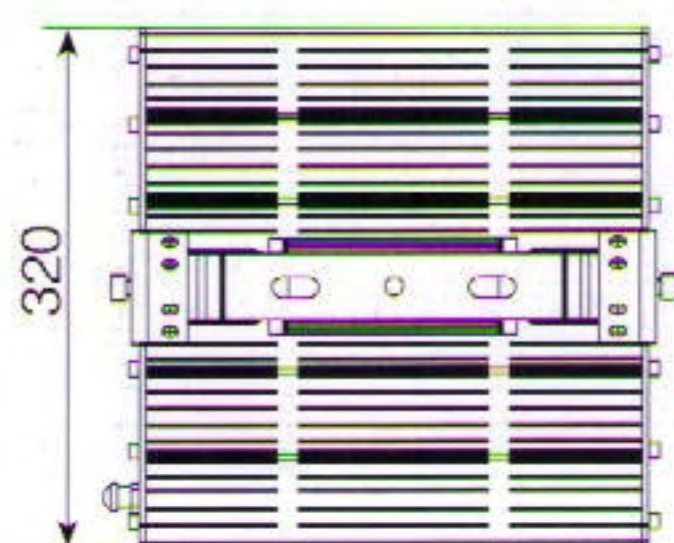


701-60W

Product Dimension (mm)

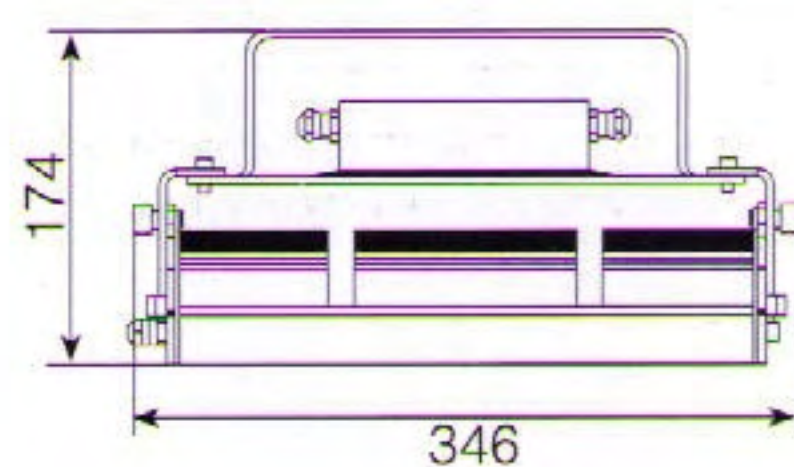

ISO-Illuminance Curve

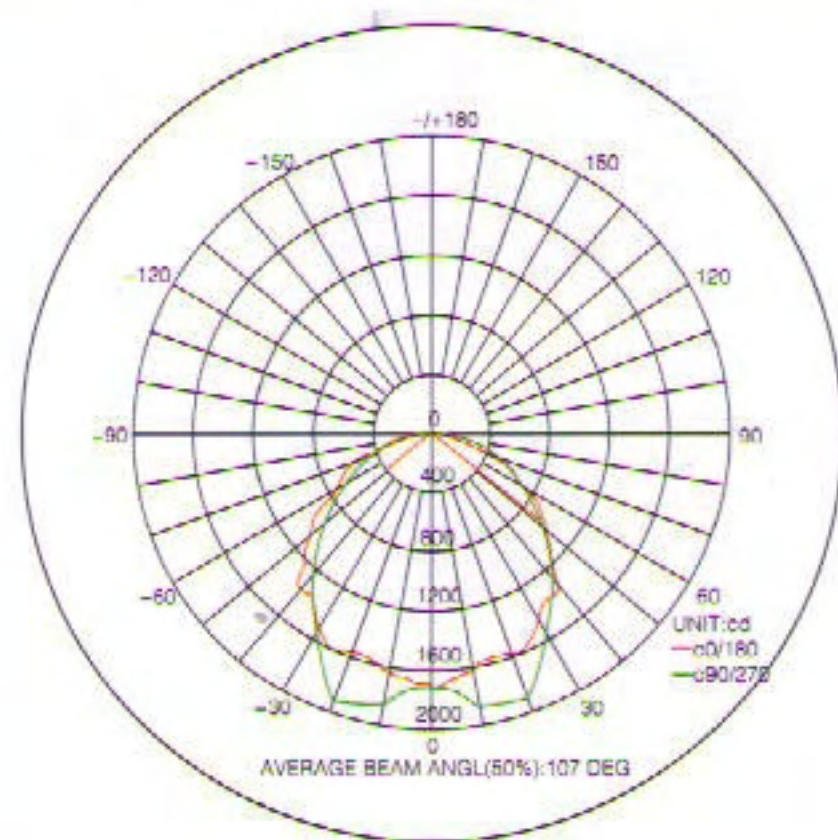

Model No.	701-60W
LED Q' ty, LED Power	60pcs, 60W
Total Power	70W
Input Voltage	90-277V AC
Frequency Range	50 - 60 HZ
Power Supply Efficiency	≥90%
Total Harmonic Distortion(THD)	< 10%
LED Initial Luminous Flux	6,600lm (Ta=25°C)
LED Maintain Luminous Flux	6,000lm (Ta=25°C)
Lamp's Output Ratio/ Efficiency	≥90%
Power Factor(PF)	≥0.99
Color Temperature(CCT)	Cool White: 6,000 - 6,500K; Pure White: 5,000 - 5,500K; Warm White: 3,000 - 3,500K
Color Index(CRI)	Pure White: Ra ≥ 75; Warm White: Ra ≥ 80
Beam Angle (50%)	Vertical Axis: 107° , Horizontal Axis: 98°
Beam Angle (10%)	Vertical Axis: 151° , Horizontal Axis: 162°
Effective Illuminated Area (50% Beam Angle)	(H=4m): Φ 11m
	(H=5m): Φ 13m
	(H=6m): Φ 16m
Center Illumination (E) (50% Beam Angle)	(H=4m) ≥ 112.60 Lux
	(H=5m) ≥ 72.04 Lux
	(H=6m) ≥ 50.03 Lux
Average Illumination (E) (50% Beam Angle)	(H=4m) ≥ 38.50 Lux
	(H=5m) ≥ 24.64 Lux
	(H=6m) ≥ 17.11 Lux
IP Rating	IP65
Working Temperature	-30 to 50°C
Working Humidity	10 to 90% RH
Storage Temperature	-10 to 50°C
Lifespan	50,000hrs life, 3yrs warranty
Light Body & Shade	Aluminum and Reinforced Glass
Light Dimension	346 x 320 x 174mm
Light N.W	8.5 kgs
Packing Manner	1pcs/Carton
Packing Dimension	562 x 432 x 265 mm
Packing G.W	10.0 kgs